


Specifications Sheet: PRIME FOCUS MESH DISH KIT Meter DISH supplied as 6-Petal

Available F/D: 0.45 (P/N: FPD 3M0 KIT/6P/DIY)



3 meter DISH KIT

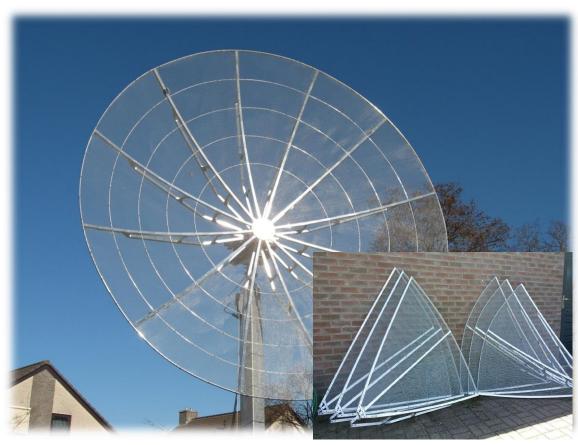



- ✓ This 3 Meter Prime Focus MESH DISH KIT is specially designed to use with prime focus dish feeds.
- ✓ RF HAMDESIGN can offer you a wide range of Dish feeds, Linear (H or V) or circular (LHCP or RHCP) polarized. Multiband linear dish feeds up to 5 band are also available.
- ✓ We can supply you several dish feeds clamps to fit a dish feed.
- ✓ Built up notes of each Mesh Dish are in the delivered user manual described step by step with lot of pictures.
- ✓ All delivered mounting parts are made of stainless steel and or Aluminum.
- ✓ To assemble RF HAMDESIGN's 6-Petal DISH KIT you only need some small hand tools, open end spanner No. 10 and 13, hand driller, fine liner, etc.
- ✓ Assembly time is about 6... 8 hours.
- ✓ This 3M0 6-Petal Dish is NOT available as Readymade 3M0 6-Petal Dish incl mounted Mesh only as Do It Yourself KIT.



Specifications 3 Meter Prime Focus Mesh Dish 6-Petal

| Mesh useable up to | 6 GHz |
|---|--|
| Weight 3M dish (ex dish feed) | 33 Kg |
| Wind load 120 Km/h | 771 N |
| DISH Surface area: | 7.07 M2 |
| Supplied including Mast clamp | No: Available Option |
| 2 pcs CNC Milled Hub | Aluminum, 20cm diameter / 10mm thickness |
| Dish Material / Wire Mesh Material | Aluminum, not painted / Wire mesh galvanized |
| Supplied bolts / nuts / washers | Stainless steel |
| 16 pcs 20mm assembled ribs ready to place | Aluminum |
| Inner rings to secure mesh | 5mm rod / Aluminum |
| Feed support including | 3 or 4 leg 15 or 20mm/sq / Aluminum |
| Available F/D | 0.45 |

Gain calculation


(Surface quality factor (eta) 0.65)

| Frequency MHz | Gain dBi | 1/2-power (3 dB) beam widths Degree |
|--------------------|----------|-------------------------------------|
| 1296 | 30.3 | 5.7 |
| 2320 | 35.4 | 3.2 |
| 3456 | 38.8 | 2.1 |
| 5760 | 43.3 | 1.3 |
| 10368 (2.8mm mesh) | N.A. | N.A. |

Focal length

(Focal length: the distance from the center of the dish to the front of the dish feed.

| DISH SIZE | F/D=0.45 |
|-----------|----------|
| 3 meter | 135 cm |

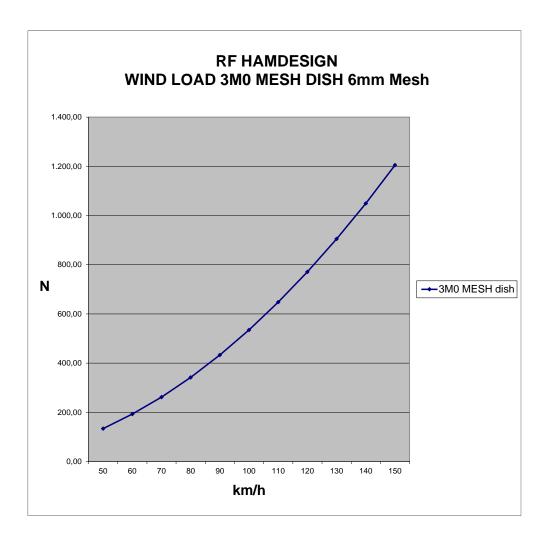

Available options to rotate the 3M0 Meter 6-Petal Mesh DISH

- SPID Azimuth / Elevation Model: BIGRAS/HR rotator
- Incl controller and built in track interface, type MD-01 (19" rack mount model) or MD-02 (Desk top model)
- Resolution standard 0.1 degree / step






- PS-01 Power supply 110~230Volts
- AC Dual Voltage output used for MD-01 / 02 controller
- 19# Rack mount model
- Or Desktop model: PS-02
- •

- 0 Mail
- 4-Core control cable (Motor Drive)
- 25 Meter length
- Option: Longer run screened sensor control cable



- 6-Core control cable (Sensor)
- 25 Meter length
- Option: Longer run screened sensor control cable



- Mounting bracket to interface dish and Rotator
- Model: UA-02
- Supplied incl counter weight arms (Counter weight not included)
- Centre pipe not included!



- Mounting bracket to interface dish and Rotator
- Model: BR-03
- Made of aluminium
- Stainless steel bolts
- Easy to mount to all SPID AZ&EL rotators
- Supplied including 70cm Centre Pipe

BR-03 = More simple version of UA-02, counter weight arms are not included, should be placed by user yourself



Note: Prices can be found in our price list, download link at our web-

site:www.rfhamdesign.com